

B 级屏蔽机柜 Shielding Cabinet (B)

一. 产品说明 Product Introduction

电磁屏蔽柜用于防止计算机、网络服务器和通讯电子设备的电磁泄露、抵御外界的电磁干扰。

The electromagnetic screen cabinet uses in to prevent the computer, the network server and the communication electronic installation electromagnetic revelation, the resistance outside electromagnetism interference.

二. 性能指标 Performance data

满足国军标 B 级要求, 根据用户要求可特殊制作, 提高屏蔽指标。

Satisfies the national troops sign B level request, may specially manufacture according to the user request, enhances the shield target.

三. 结构组成 Structure

屏蔽壳体、屏蔽门、滤波器、通风波导窗、波导管、服务器支架, 顶部有轴流风机四只, 单只排风量 1.4m³/min; 。

Shields the shell, the shield gate, the filter, the well ventilated wave guide window, the wave guide, the server support.

四. 特点 Characteristic:

可靠、轻便、布置灵活、节省投资。

Reliable, facile, the arrangement is nimble, saves the investment

五. 屏蔽效能: Shield performance


150KHZ ≥ 70Db

450MHZ ≥ 100dB

930MHZ ≥ 120dB

六. 测试方法 Test method

- (1) 《涉及国家秘密的计算机信息系统保密技术要求》 BMZ1-2000
- (2) 《信息设备电磁泄露发射限值》 GGBB1-1999
- (3) 《处理涉密信息的电磁屏蔽室的技术要求和测试方法》 BMB3-1999
- (4) 《涉密信息设备使用现场的电磁泄露发射防护要求》 BMB5-2000
- (5)

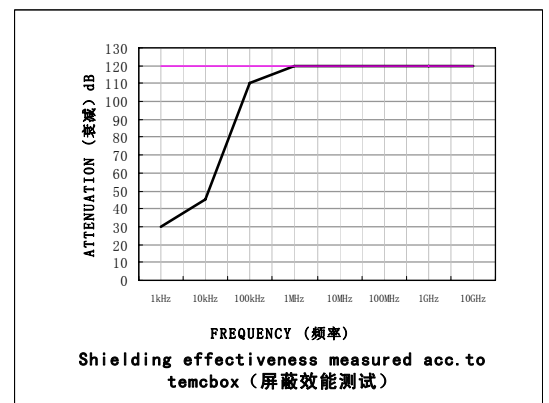

七. 尺寸 Dimension

尺寸 mm			U
宽度	高	深	
600	800	600	15
600	1200	600	24
800	1200	600	24
800	1200	800	24
800	1200	1000	24
600	1800	600	38
600	1800	800	38
800	1800	600	38
800	1800	800	38
800	1800	1000	38
800	1800	1200	38
600	2000	600	42
600	2000	800	42
800	2000	600	42
800	2000	800	42
800	2000	1000	42
800	2000	1200	42



